

OXYGEN



Next generation ventilation units
easy to install, easy to use

JUST LIKE BREATHING


MADE IN LITHUANIA

oxygen.lt

Simple, innovative solutions

Who are we and what do we want?

What are our guidelines?

Only well-conceived solutions

We are OXYGEN – developers and manufacturers of advanced Lithuanian ventilation systems. Our mission is to ensure a healthy microclimate in every home. We aim to break market stereotypes and offer a superior alternative – smarter, more efficient and more compact products.

Inspired by the European Commission's ambitious strategy for sustainable economic growth, the European Green Deal, together with the KTU University team, we have developed a compact, easy-to-install and easy-to-use heat recovery unit, controlled by a unique energy-saving algorithm.

We offer well-thought-out solutions based on modern technologies and products that are easy to install and user-friendly. With OXYGEN, it's as easy as breathing.



Healthy home microclimate

Enthalpy

Forget dry mouths, dry eyes and skin, and hundreds of euros spent on moisturizers. Enthalpy is cutting-edge technology that preserves the humidity in your home, and therefore helps maintain your health.

Heat and cool recovery

A heat recovery unit is like a fridge that can never be switched off. It is useful in both winter and summer because it efficiently keeps your home warm or cool, saving you money.

Fresh air and hygiene

Ventilation ensures that air has the right amount of oxygen, eliminating harmful CO₂. The filters trap dust, insects and even germs. Rest assured, thanks to the hygienic airflow technology, unwanted kitchen smells are eliminated.



Tailored to Lithuanian and Nordic climates

Non-freezing

Your smart heat recovery unit will never freeze. We guarantee uninterrupted ventilation for your home.

Low costs

Thanks to 5 internal sensors and a unique energy-saving algorithm, you'll conserve heat while ventilating your home, using the minimum amount of electricity.

High energy efficiency

OXYGEN heat recovery ventilators with advanced plate counterflow heat exchangers are suitable for even the highest energy class A++. Save up to 93% energy.



Easy to install

Everything is included


The electric heater, control automation and other necessary components are located inside the unit, eliminating the time and cost of installing external ventilation accessories and reducing the space required to install the heat recovery unit.

Lightweight

The compact and ultra-lightweight OXYGEN heat recovery unit housing is made of EPP material with excellent thermal and acoustic insulation properties. Installing OXYGEN products alone is fast and easy.

Smart control

Enjoy all the smart features by controlling the heat recovery unit via the app or the color LCD touchscreen control panel.

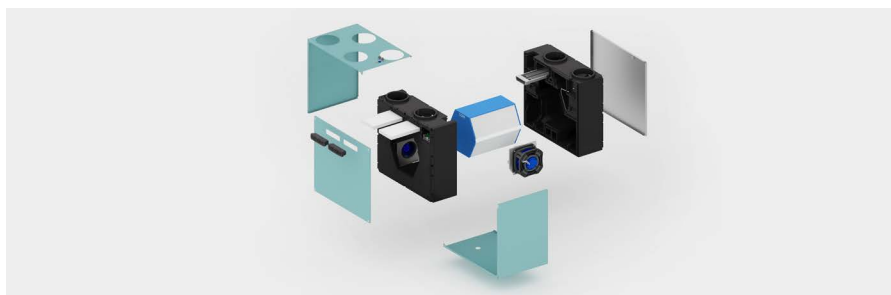

Comfort features

Bathroom mode

Press the auxiliary switch together with the light switch to activate the increased ventilation mode and the heat recovery unit will remove steam and unwanted odors.

Hood mode

Activate the enhanced ventilation mode while cooking. When coupled to the extractor fan, the heat recovery unit will extract vapors and unwanted odors.

Summer ventilation

Enjoy fresh air in summer by opening your windows, and entrust the heat recovery unit with the ventilation of bathrooms, kitchens and other enclosed spaces.



Easy to use

Iconic color


Oxygen Elemental is an iconic color that embodies the fundamental building block of life—oxygen element itself. With its vibrant turquoise hue, it highlights the natural and scientific connection to breathable air, merging the essence of nature with cutting-edge innovation.

Easy maintenance

Easily replace the filters by opening the filter covers. OXYGEN heat recovery units no longer require any servicing.

An invisible helper

The heat recovery unit will adapt to your lifestyle – a weekly ventilation program will give you extra comfort every day.

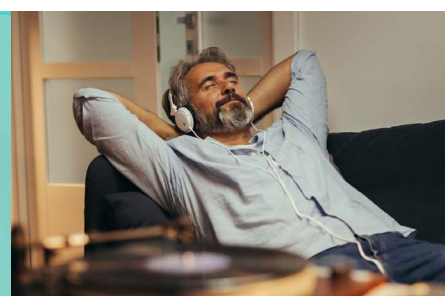

EASY V200

Smart Wall-mounted Heat Recovery Unit

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A++ 100 m²

93.1 % heat recovery

Easy to replace filters

Easy to install

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ebmpapst

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000147	Easy V200 right
P000149	Easy V200 left
P000148	Easy V200 right with integrated CO2 sensor*
P000150	Easy V200 left with integrated CO2 sensor*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch control with Wifi and Bluetooth white
P000005	LCD SimpleTouch control with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Quiet operation



Comfort & Well-being



Energy efficient



EcoDesign compliant



Integrated CO2

EASY V200

Technical specification

OXYGEN

Specific energy consumption (SEC), SEC class

Cold climate	kWh/m ² .a	-82.2
Average climate	kWh/m ² .a	-42.1
Warm climate	kWh/m ² .a	-16.5

Declared typology Bi-directional, residential ventilation

Type of drive installed or intended to be Variable speed drive

Type of heat recovery system Recuperative

Thermal efficiency of heat recovery % 93.1

Maximum flow rate m³/h 196

Electric power input of the fan drive, including W 165

Sound power level (LWA) dB 51

Reference flow rate m³/s 0.041

Reference pressure difference Pa 50

Specific power input (SPI) W/(m³/h) 0.38

Control factor 0.65

Control typology Local demand control

Declared maximum leakage rate:

Internal	%	1.6
External	%	1.7

The annual electricity consumption (AEC) kWh/100m².a 247

The annual heating saved (AHS)

Cold climate	kWh/100m ² .a	9307
Average climate	kWh/100m ² .a	4758
Warm climate	kWh/100m ² .a	2151

Integrated adaptive pre-heater W 800

Power supply 230V, 50Hz, 5A



Dimensions mm 598x 691 x 363

Weight kg 23

Color Oxygen Elemental

Compliance and standards 2009/125/EB: ES 1253/2014, ES 1254/2014, ES 1017/1369, EN 13141-7:2010; 2010/30/ES: ES 1254/2014; 2011/65/ES: EN 50581(2012); 2014/35/ES: EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

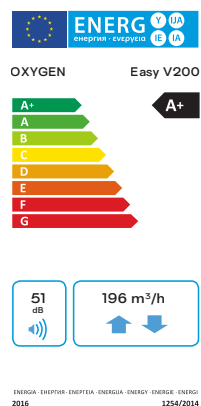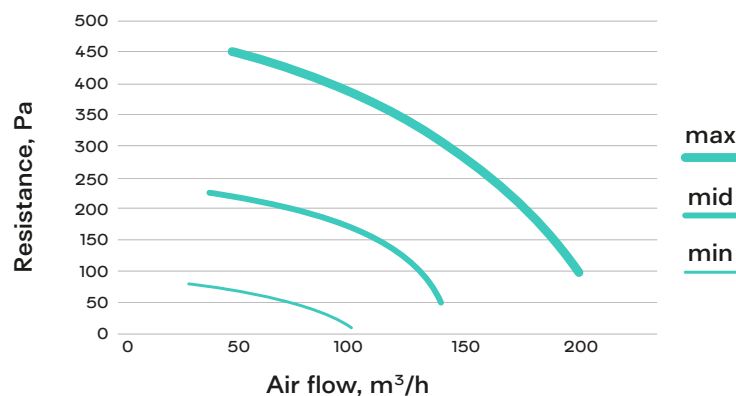

OXYGEN group, JSC

Birželio 23-osios st. 29, Kaunas 50201, Lithuania

MADE IN LITHUANIA

oxygen.lt

EASY V200E

Smart Wall-mounted Heat Recovery Unit **With Enthalpy**

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A++ 100 m²

86.2 % heat recovery

Cabinet compatible

Moisture recovery

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ebmpapst

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000151	Easy V200E enthalpy right
P000153	Easy V200E enthalpy left
P000152	Easy V200E enthalpy right with integrated CO2 sensor*
P000154	Easy V200E enthalpy left with integrated CO2 sensor*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch panel with Wifi and Bluetooth white
P000005	LCD SimpleTouch panel with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Moisture recovery



Comfort & Well-being



Energy efficient



EcoDesign ready



Integrated CO2

EASY V200E

Technical specification



OXYGEN

Specific energy consumption (SEC), SEC class

Cold climate	kWh/m ² .a	-79.6
Average climate	kWh/m ² .a	-40.8
Warm climate	kWh/m ² .a	-16.0
Declared typology	Bi-directional, residential ventilation	
Type of drive installed or intended to be	Variable speed drive	
Type of heat recovery system	Recuperative	
Thermal efficiency of heat recovery	%	86.2
Maximum flow rate	m ³ /h	192
Electric power input of the fan drive, including	W	165
Sound power level (LWA)	dB	51
Reference flow rate	m ³ /s	0.040
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.37
Control factor	0.65	
Control typology	Local demand control	
Declared maximum leakage rate:		
Internal	%	1.6
External	%	1.7
The annual electricity consumption (AEC)	kWh/100m ² .a	240
The annual heating saved (AHS)		
Cold climate	kWh/100m ² .a	9028
Average climate	kWh/100m ² .a	4615
Warm climate	kWh/100m ² .a	2087
Integrated adaptive pre-heater	W	800
Power supply	230V, 50Hz, 5A	
Dimensions	mm	598 x 691 x 363
Weight	kg	25
Color	Oxygen Elemental	

Compliance and standards **2009/125/EB:** ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; **2010/30/ES:** ES 1254/2014; **2011/65/ES:** EN 50581(2012); **2014/35/ES:** EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

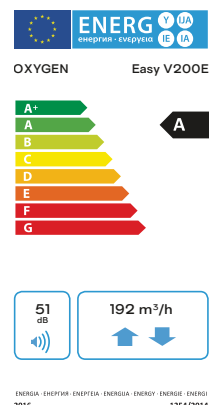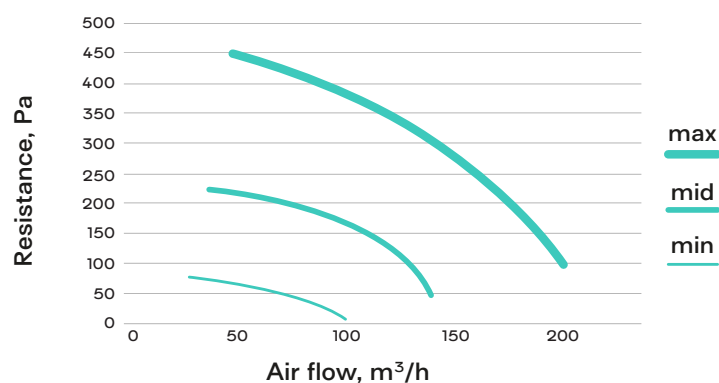

EASY V400

Smart Wall-mounted Heat Recovery Unit

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A++ 200 m²

86.2 % heat recovery

Easy to replace filters

Easy to install

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ZIEHL-ABEGG 

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000108	Easy V400 right
P000109	Easy V400 left
P000117	Easy V400 right with integrated CO2 sensor*
P000118	Easy V400 left with integrated CO2 sensor*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch control with Wifi and Bluetooth white
P000005	LCD SimpleTouch control with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Quiet operation



Comfort & Well-being



Energy efficient



EcoDesign compliant





Integrated CO2

Technical specification

Specific energy consumption (SEC), SEC class

Cold climate	kWh/m².a	-81.6
Average climate	kWh/m².a	-42.8
Warm climate	kWh/m².a	-18.0
Declared typology		Bi-directional, residential ventilation
Type of drive installed or intended to be		Variable speed drive
Type of heat recovery system		Recuperative
Thermal efficiency of heat recovery	%	86.2
Maximum flow rate	m³/h	400
Electric power input of the fan drive, including	W	167
Sound power level (LWA)	dB	51
Reference flow rate	m³/s	0.078
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m³/h)	0.22
Control factor		0.65
Control typology		Local demand control
Declared maximum leakage rate:		
Internal	%	1.2
External	%	1.1
The annual electricity consumption (AEC)	kWh/100m².a	160
The annual heating saved (AHS)		
Cold climate	kWh/100m².a	9028
Average climate	kWh/100m².a	4615
Warm climate	kWh/100m².a	2087
Integrated adaptive pre-heater	W	2000
Power supply		230V, 50Hz, 5A
Dimensions	mm	750x 679 x 513
Weight	kg	32
Color		Oxygen Elemental

Compliance and standards **2009/125/EB:** ES 1253/2014, ES 1254/2014, ES 1017/1369, EN 13141-7:2010; **2010/30/ES:** ES 1254/2014; **2011/65/ES:** EN 50581(2012); **2014/35/ES:** EN 60335-1:2012, EN 60335-1:2012/A11:2014.

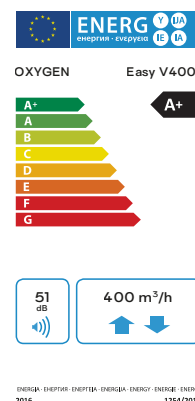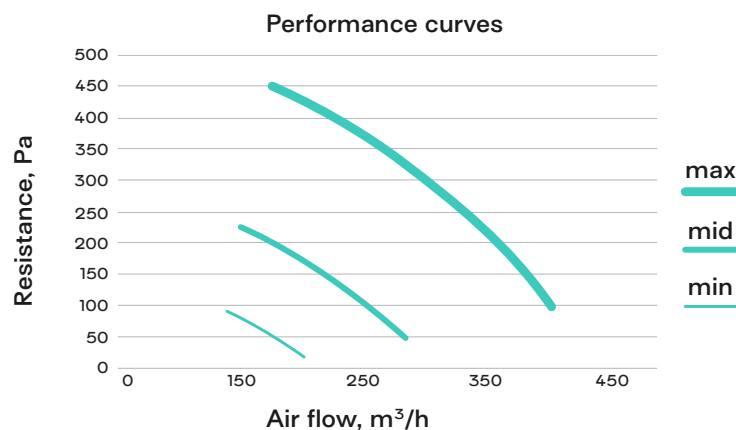

MADE IN LITHUANIA

oxygen.it

EASY V400E

Smart Wall-mounted Heat Recovery Unit **With Enthalpy**

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A++ 200 m²

80.5 % heat recovery

Easy to replace filters

Moisture recovery

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ZIEHL-ABEGG 

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000069	Easy V400E enthalpy right
P000070	Easy V400E enthalpy left
P000119	Easy V400E enthalpy right with integrated CO2 sensor*
P000120	Easy V400E enthalpy left with integrated CO2 sensor*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch control with Wifi and Bluetooth white
P000005	LCD SimpleTouch control with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Moisture recovery



Comfort & Well-being



Energy efficient



EcoDesign compliant



Integrated CO2

EASY V400E

Technical specification

OXYGEN



Specific energy consumption (SEC), SEC class

Cold climate	kWh/m ² .a	-78.3
Average climate	kWh/m ² .a	-40.6
Warm climate	kWh/m ² .a	-16.4
Declared typology		Bi-directional, residential ventilation
Type of drive installed or intended to be		Variable speed drive
Type of heat recovery system		Recuperative
Thermal efficiency of heat recovery	%	80.5
Maximum flow rate	m ³ /h	400
Electric power input of the fan drive, including	W	167
Sound power level (LWA)	dB	51
Reference flow rate	m ³ /s	0.078
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.29
Control factor		0.65
Control typology		Local demand control
Declared maximum leakage rate:		
Internal	%	0.8
External	%	0.6
The annual electricity consumption (AEC)	kWh/100m ² .a	201
The annual heating saved (AHS)		
Cold climate	kWh/100m ² .a	8798
Average climate	kWh/100m ² .a	4498
Warm climate	kWh/100m ² .a	2034
Integrated adaptive pre-heater	W	2000
Power supply		230V, 50Hz, 5A
Dimensions	mm	750 x 679 x 513
Weight	kg	35
Color		Oxygen Elemental

Compliance and standards

2009/125/EB: ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; 2010/30/ES: ES 1254/2014; 2011/65/ES: EN 50581(2012); 2014/35/ES: EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

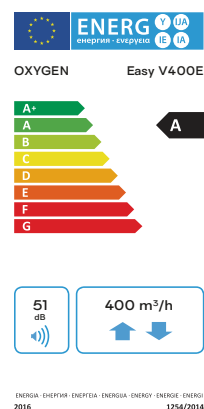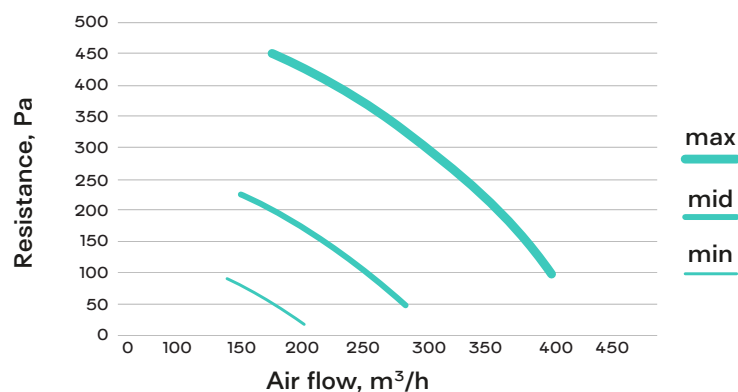

OXYGEN group, JSC

Birželio 23-osios st. 29, Kaunas 50201, Lithuania

MADE IN LITHUANIA

oxygen.lt

EASY V500

Smart Wall-mounted Heat Recovery Unit

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A++ 250 m²

85.4 % heat recovery

Easy to replace filters

Easy to install

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ZIEHL-ABEGG 

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000111	Easy V500 right
P000110	Easy V500 left
P000121	Easy V500 right with integrated CO2 sensor*
P000122	Easy V500 left with integrated CO2 sensor*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch control with Wifi and Bluetooth white
P000005	LCD SimpleTouch control with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Quiet operation



Comfort & Well-being



Energy efficient



EcoDesign compliant



Integrated CO2

EASY V500

Technical specification



OXYGEN

Specific energy consumption (SEC), SEC class

Cold climate	kWh/m ² .a	-80.2
Average climate	kWh/m ² .a	-41.6
Warm climate	kWh/m ² .a	-16.9
Declared typology	Bi-directional, residential ventilation	
Type of drive installed or intended to be	Variable speed drive	
Type of heat recovery system	Recuperative	
Thermal efficiency of heat recovery	%	85.4
Maximum flow rate	m ³ /h	500
Electric power input of the fan drive, including	W	252
Sound power level (LWA)	dB	53
Reference flow rate	m ³ /s	0.097
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.30
Control factor	0.65	
Control typology	Local demand control	
Declared maximum leakage rate:		
Internal	%	1.2
External	%	1.1
The annual electricity consumption (AEC)	kWh/100m ² .a	202
The annual heating saved (AHS)		
Cold climate	kWh/100m ² .a	8995
Average climate	kWh/100m ² .a	4598
Warm climate	kWh/100m ² .a	2079
Integrated adaptive pre-heater	W	2000
Power supply	230V, 50Hz, 5A	
Dimensions	mm	750 x 679 x 513
Weight	kg	32
Color	Oxygen Elemental	

Compliance and standards **2009/125/EB:** ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; **2010/30/ES:** ES 1254/2014; **2011/65/ES:** EN 50581(2012); **2014/35/ES:** EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

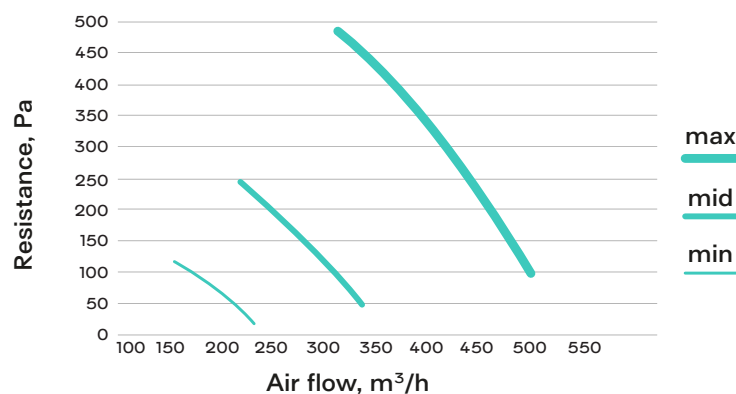

OXYGEN group, JSC

Birželio 23-osios st. 29, Kaunas 50201, Lithuania

MADE IN LITHUANIA

oxygen.lt

EASY V500E

Smart Wall-mounted Heat Recovery Unit **With Enthalpy**

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A+ 250 m²

77,1 % heat recovery

Easy to replace filters

Moisture recovery

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ZIEHL-ABEGG 

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000077	Easy V500E enthalpy right
P000078	Easy V500E enthalpy left
P000123	Easy V500E enthalpy right with integrated CO2 sensor*
P000124	Easy V500E enthalpy left with integrated CO2 sensor*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch control with Wifi and Bluetooth white
P000005	LCD SimpleTouch control with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Moisture recovery



Comfort & Well-being



Energy efficient



EcoDesign compliant



Integrated CO2

EASY V500E

Technical specification



OXYGEN

Specific energy consumption (SEC), SEC class

Cold climate	kWh/m ² .a	-76.1
Average climate	kWh/m ² .a	-39.1
Warm climate	kWh/m ² .a	-15.3
Declared typology	Bi-directional, residential ventilation	
Type of drive installed or intended to be	Variable speed drive	
Type of heat recovery system	Recuperative	
Thermal efficiency of heat recovery	%	77.1
Maximum flow rate	m ³ /h	500
Electric power input of the fan drive, including	W	252
Sound power level (LWA)	dB	53
Reference flow rate	m ³ /s	0.097
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m ³ /h)	0.30
Control factor	0.65	
Control typology	Local demand control	
Declared maximum leakage rate:		
Internal	%	0.8
External	%	0.6
The annual electricity consumption (AEC)	kWh/100m ² .a	233
The annual heating saved (AHS)		
Cold climate	kWh/100m ² .a	8659
Average climate	kWh/100m ² .a	4426
Warm climate	kWh/100m ² .a	2002
Integrated adaptive pre-heater	W	2000
Power supply	230V, 50Hz, 5A	
Dimensions	mm	750 x 679 x 513
Weight	kg	35
Color	Oxygen Elemental	

Compliance and standards **2009/125/EB:** ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; **2010/30/ES:** ES 1254/2014; **2011/65/ES:** EN 50581(2012); **2014/35/ES:** EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

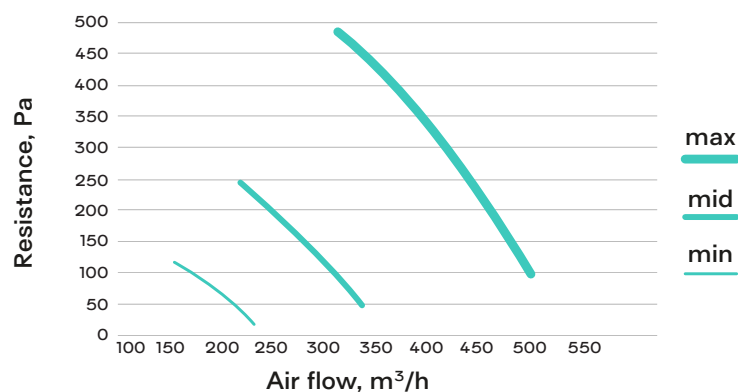

OXYGEN group, JSC

Birželio 23-osios st. 29, Kaunas 50201, Lithuania

MADE IN LITHUANIA

oxygen.lt

EASY V600

Smart Wall-mounted Heat Recovery Unit

OXYGEN

Just like breathing

Next generation smart **non-freezing** ventilation units easy to install, easy to use



Suitable up to A++ 300 m²

84.6 % heat recovery

Easy to replace filters

Easy to install

Non-freezing

Non-freezing

CO2 control *

Bluetooth and Wifi

Integrated adaptive pre-heater

Unique energy-saving algorithm

ebmpapst

German fans

Intelligent control that helps you breathe easier

With the powerful Amazon Web Service cloud solution



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

SKU

Product

P000113	Easy V600 right
P000112	Easy V600 left
P000125	Easy V600 right with integrated CO2 sensor*
P000126	Easy V600 kairinis su integruotu CO2 davikliu*
P000004	Easy control panel with Wifi and Bluetooth white
P000176	Easy control panel with Wifi and Bluetooth black
P000182	LCD SimpleTouch control with Wifi and Bluetooth white
P000005	LCD SimpleTouch control with Wifi and Bluetooth black



Compact design



Easy to install



Smart management



Quiet operation



Comfort & Well-being



Energy efficient



EcoDesign compliant



Integrated CO2

EASY V600

Technical specification



OXYGEN

Specific energy consumption (SEC), SEC class

Cold climate	kWh/m².a	-78.6
Average climate	kWh/m².a	-40.2
Warm climate	kWh/m².a	-15.6
Declared typology	Bi-directional, residential ventilation	
Type of drive installed or intended to be	Variable speed drive	
Type of heat recovery system	Recuperative	
Thermal efficiency of heat recovery	%	84.6
Maximum flow rate	m³/h	568
Electric power input of the fan drive, including	W	340
Sound power level (LWA)	dB	55
Reference flow rate	m³/s	0.117
Reference pressure difference	Pa	50
Specific power input (SPI)	W/(m³/h)	0.39
Control factor	0.65	
Control typology	Local demand control	
Declared maximum leakage rate:		
Internal	%	1.2
External	%	1.1
The annual electricity consumption (AEC)	kWh/100m².a	252
The annual heating saved (AHS)		
Cold climate	kWh/100m².a	8963
Average climate	kWh/100m².a	4582
Warm climate	kWh/100m².a	2072
Integrated adaptive pre-heater	W	2000
Power supply	230V, 50Hz, 5A	
Dimensions	mm	750 x 679 x 513
Weight	kg	32
Color	Oxygen Elemental	

Compliance and standards **2009/125/EB:** ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; **2010/30/ES:** ES 1254/2014; **2011/65/ES:** EN 50581(2012); **2014/35/ES:** EN 60335-1:2012, EN 60335-1:2012/A11:2014.

Performance curves

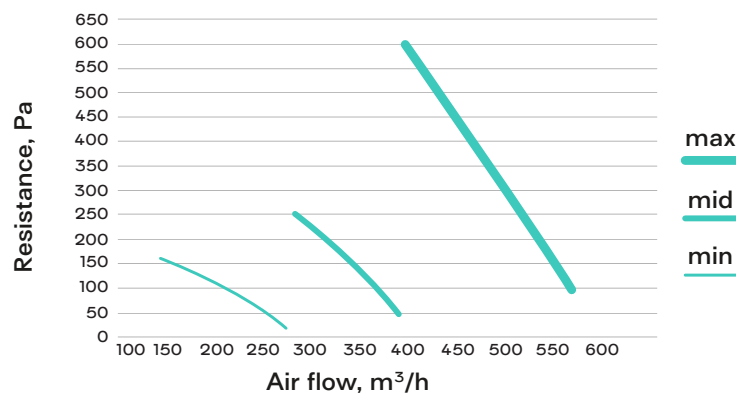

OXYGEN group, JSC

Birželio 23-osios st. 29, Kaunas 50201, Lithuania

MADE IN LITHUANIA

oxygen.lt




Heat recovery unit = health

A ventilation unit is an investment in your health. By having a smart ventilation system at home, you can create healthier living conditions. Why is clean air so important for the human body?

Heat recovery unit as a cure for diseases

Poor sleep, fatigue or inability to concentrate – these problems are often caused by poor indoor air quality. Ensuring that fresh air is constantly circulating in your home is a big step towards a healthy home microclimate.

Ventilation unit protect against:



Sustainability

The European Commission's strategy for sustainable growth – the European Green Deal – envisages energy-efficient and, in the future, passive houses. Perhaps the most important element of such homes is the heat recovery system. A recuperator is a sustainable product that reduces our CO2 footprint while conserving energy. Breathe eco-friendly air.

Intelligent control that helps you breathe easier



Easy panels



LCD SimpleTouch



OXYGEN easy app



OXYGEN easy cloud



History of use

With the powerful Amazon Web Service cloud solution





Finally, beautiful panels

Elegant panels are equipped with both WiFi and Bluetooth. Along with the panels, customers gain access to the OXYGEN Easy App and the OXYGEN Easy Cloud platform, enabling control from anywhere in the world.

Control from anywhere

The new OXYGEN Easy models can be conveniently controlled from anywhere in the world using the OXYGEN Easy App (available for iOS and Android) and the OXYGEN Easy Cloud platform.




Balancing via Bluetooth

Installers can now effortlessly perform the startup and balancing of the ventilation unit via Bluetooth using the OXYGEN Installer App. This mobile application works without an internet connection, which is often unavailable at installation sites during ventilation system setup.

Data Chart

Easily review the usage history of the unit with detailed information provided by 5 sensors.

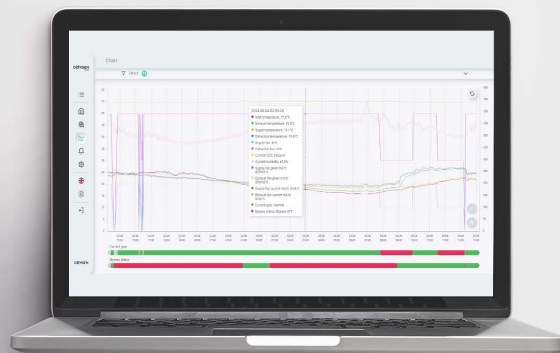

Heat recovery unit, Easy	V200	V200E	V400	V400E	V500	V500E	V600
Specific energy consumption (SEC), SEC class							
Cold climate, kWh/m ² .a	-82.2	-79.6	-81.6	-78.3	-80.2	-76.1	-78.6
Average climate, kWh/m ² .a	-42.1	-40.8	-42.8	-40.6	-41.6	-39.1	-40.2
Warm climate, kWh/m ² .a	-16.5	-16.0	-18.0	-16.4	-16.9	-15.3	-15.6
Thermal efficiency of heat recovery, %	93.1	86.2	86.2	80.5	85.4	77.1	84.6
Type of heat recovery system	Counter-flow	Enthalpy	Counter-flow	Enthalpy	Counter-flow	Enthalpy	Counter-flow
Maximum flow rate, m ³ /h	196	192	400	400	500	500	568
Suitable up to, m ²	100	100	200	200	250	250	300
Electric power input of the fan drive, including, W	165	165	167	167	252	252	340
Sound power level (LWA), dB	51	51	51	51	53	53	55
Reference flow rate, m ³ /s	0.041	0.040	0.078	0.078	0.097	0.097	0.117
Reference pressure difference, Pa	50	50	50	50	50	50	50
Specific power input (SPI), W/(m ³ /h)	0.38	0.37	0.22	0.29	0.30	0.35	0.39
Control factor	0.65	0.65	0.65	0.65	0.65	0.65	0.65
Declared maximum leakage rate:							
Internal, %	1.6	1.6	1.2	0.8	1.2	0.8	1.2
External, %	1.7	1.7	1.1	0.6	1.1	0.6	1.1
The annual electricity consumption (AEC), kWh/100m ² .a	247	240	160	201	202	233	252
The annual heating saved, (AHS)							
Cold climate, kWh/100m ² .a	9307	9028	9028	8798	8995	8659	8963
Average climate, kWh/100m ² .a	4758	4615	4615	4498	4598	4426	4582
Warm climate, kWh/100m ² .a	2151	2087	2087	2034	2079	2002	2072
Integrated adaptive pre-heater, W	800	800	2000	2000	2000	2000	2000
Power supply	230V, 50Hz, 5A						
Dimensions, mm	598x691x363	598x691x363	750x679x513	750x679x513	750x679x513	750x679x513	750x679x513
Weight, kg	23	25	32	35	32	35	32
Color	Oxygen Elemental						
Compliance and standards	2009/125/EB: ES 1253/2014, ES 1254/2014, ES 2017/1369, EN 13141-7:2010; 2010/30/ES: ES 1254/2014; 2011/65/ES: EN 50581(2012); 2014/35/ES: EN 60335-1:2012, EN 60335-1:2012/A11:2014.						

Users download
OXYGEN Easy app



Installers download
OXYGEN Installer app



The contents of this catalog are subjected to change without prior notice. Every possible effort has been made to ensure that the data herein is correct. However, OXYGEN group cannot assume any liability for any direct, in director consequential damages arising from the use of the information specified here.

OXY 1/25/EN